



JEANS TECHNOLOGY Vibemac Know-How


Step Sequence 16




Step Sequence 17



Step Sequence 18A






Step Sequence 19A



Developed in order to fulfill the demand of the customers for launching a reverse lap feedo, the 2262H is the “sister” of the most famous 2261H. It's strong, fast, precise, consistent in the stitch length even on the thickest parts!

The 2262H is a reverse-arm lap felling unit, 3 needle chain stitch, for double lap seaming on jeans, casual trousers, work clothes and denim clothes in general. This machine is particularly suitable to sew back yoke, back rise, inseam and outseams, plus top stitch operations. Does not have rivals also when used for shirts.

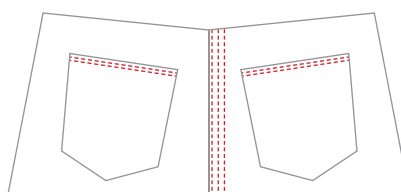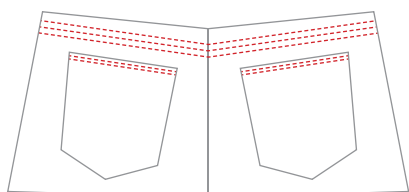

Technical Features

A special belt puller grants very fast feeding and perfect matching between the sewn parts.

After the sewing, the puller device is like a guide for the chain coming out. It will control and guide the chain into the chain cutter device.

In terms of productivity, 2262H can work at 3700 rpm, this high speed can be achieved only thanks to several outstanding features, like oil feeding lubrication, design and construction quality, puller device and a special sensor for the dynamic pressure presser foot control (DCP system).

The above mentioned DCP system avoids all the skip stitching troubles also on the crotch double thickness, the most critical point for every feed of the arm machine existing in the market.

Other important features are the hoovered chain cutter which allows the operator to work in a clean environment and the one leg adjustable stand which allows the operator to work at the preferred height.

The machine's features can be listed as follow:

- **Always High And Constant Quality:**

thanks to the special & patented DCP system, the stitching length will be constant and the operators job much easier (no need to pull/push to match 2 parts).

- **Higher Production:**

the unit's speed (3700 rpm) associated with the smart puller system and chain cutter allows a production incomparable in the market!

- **Great flexibility:**

different needle gauges grant maximum flexibility, the machine is provided to sew heavy materials but it is also possible to modify it by purchasing the light fabric kit.



Technical Specifications

Max Sewing Speed: 3700 rpm

Stitching Length: from 2 to 4,5 mm

Standard Needle Gauge: 1/4" (6,4 mm)

Optional Needle Gauge: 9/32" (7,2 mm) - 3/8" (9,6 mm) - 1/4" + 1/8" (MIX 9,6 mm)

Sewing Machine Motor: XCG 754 20Y

Power Requirement: 220V Single-Phase 50/60

Sewing Head: Vi.Be.Mac. 3 needles chain stitch

Control Box: XCG MFY 2007

Gross Weight: 130 kg
Fumigated Recycled Packing Dimension

